


elements MIC 2(AC020)

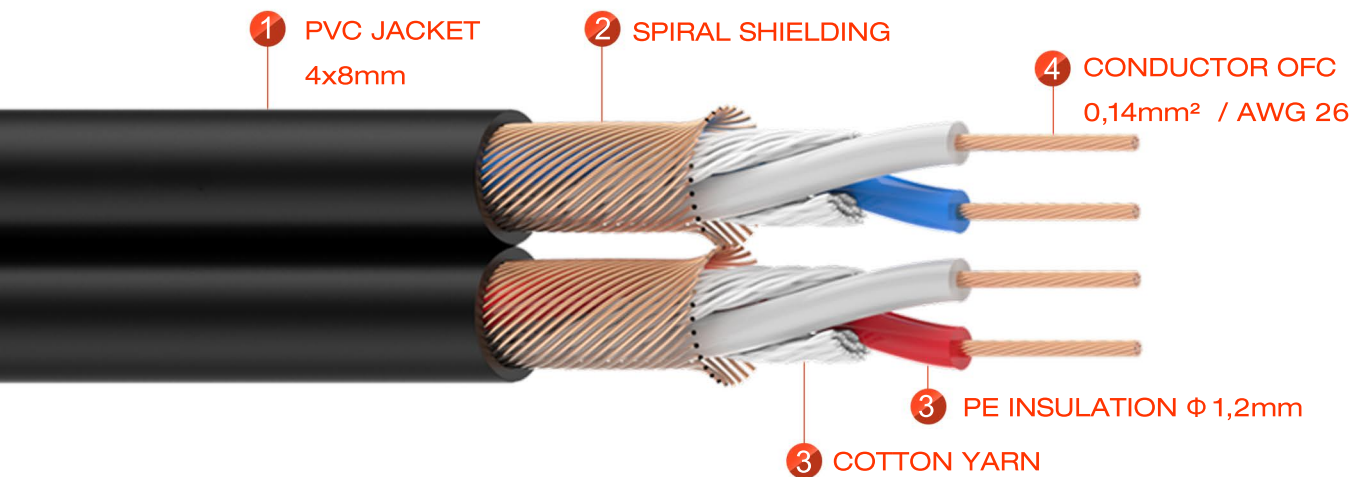

TECHNICAL DATA:

• Jacket,diameter	PVC 4x8mm
• AWG	26
• No. of inner conductors	2x2x0,14mm ²
• Copper strand per conductor	18x0,10mm
• Conductor insulation	PE Φ 1,2mm
• Shielding	copper spiral shielding
• Shielding factor	90%
• Temperature range	min. -20°C
• Temperature range	max. +70°C

ELECTRICAL DATA:

• Capac. cond./cond.per 1 m	145 pF
• Capac. cond./shield.per 1 m	250 pF
• Cond. resistance per 1 km	125 Ω
• Shield. resistance per 1 km	26 G Ω
• Insulation resist.per 1 km	>1 G Ω
• Surge impedance	110 Ω